


Service Manual



VSX-AX4AVi-S

ORDER NO.
RRV3261

AUDIO/VIDEO MULTI-CHANNEL RECEIVER

VSX-AX4AVi-S

VSX-AX2AV-S

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Model	Type	Power Requirement	The voltage can be converted by the following method.
VSX-AX4AVi-S	HYXJ	AC220-230V	AC240V, *
VSX-AX2AV-S	HYXJ	AC220-230V	AC240V, *

*: Alter the wiring of the power-supply block at the primary winding of Power transformer referring to the Line Voltage Selection described in this Service Manual ("4.19 TRANS1 and PRIMARY ASSYS").



For details, refer to "Important Check Points for Good Servicing".

PIONEER CORPORATION 4-1, Meguro 1-chome, Meguro-ku, Tokyo 153-8654, Japan
PIONEER ELECTRONICS (USA) INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.
PIONEER EUROPE NV Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936
©PIONEER CORPORATION 2005

T-ZZK OCT. 2005 printed in Japan

2.6 FRONT PANEL SECTION

A




B

C

D

E

F

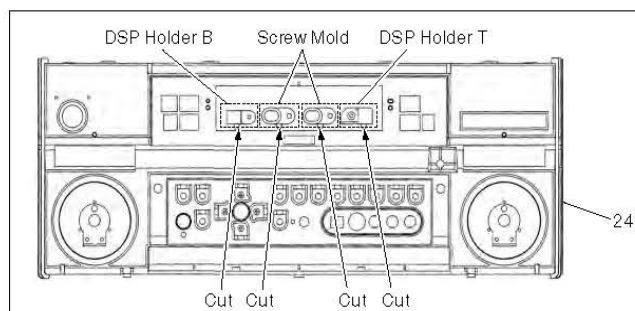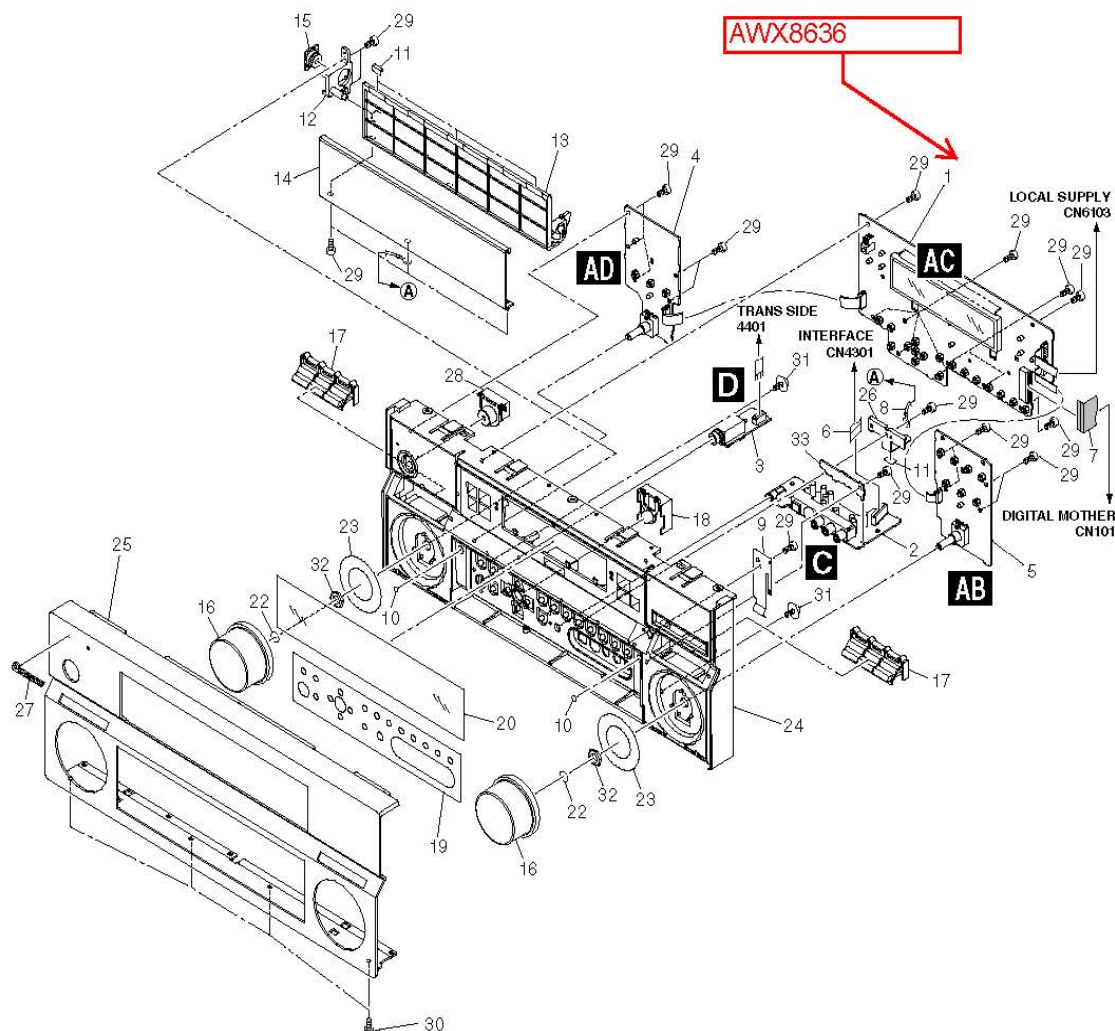

18

VSX-AX4AVi-S