


Service Manual



VSX-1015-K

ORDER NO.
RRV3138

AUDIO/VIDEO MULTI-CHANNEL RECEIVER

VSX-1015-K VSX-1015-S

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Model	Type	Porew Requirement	The voltage can be converted by the following method.
VSX-1015-K	HYXJ	AC220-230V	AC240V, *
VSX-1015-S	HYXJ	AC220-230V	AC240V, *

*: Alter the wiring of the power-supply block at the primary winding of Power transformer referring to the Line Voltage Selection described in this Service Manual ("4.18 TRANS 2-2, TRANS 1 and PRIMARY ASSYS").




For details, refer to "Important Check Points for Good Servicing".

PIONEER CORPORATION 4-1, Meguro 1-chome, Meguro-ku, Tokyo 153-8654, Japan
PIONEER ELECTRONICS (USA) INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.
PIONEER EUROPE NV Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936
©PIONEER CORPORATION 2005

T-ZZK APR. 2005 printed in Japan

2.4 REAR PANEL SECTION

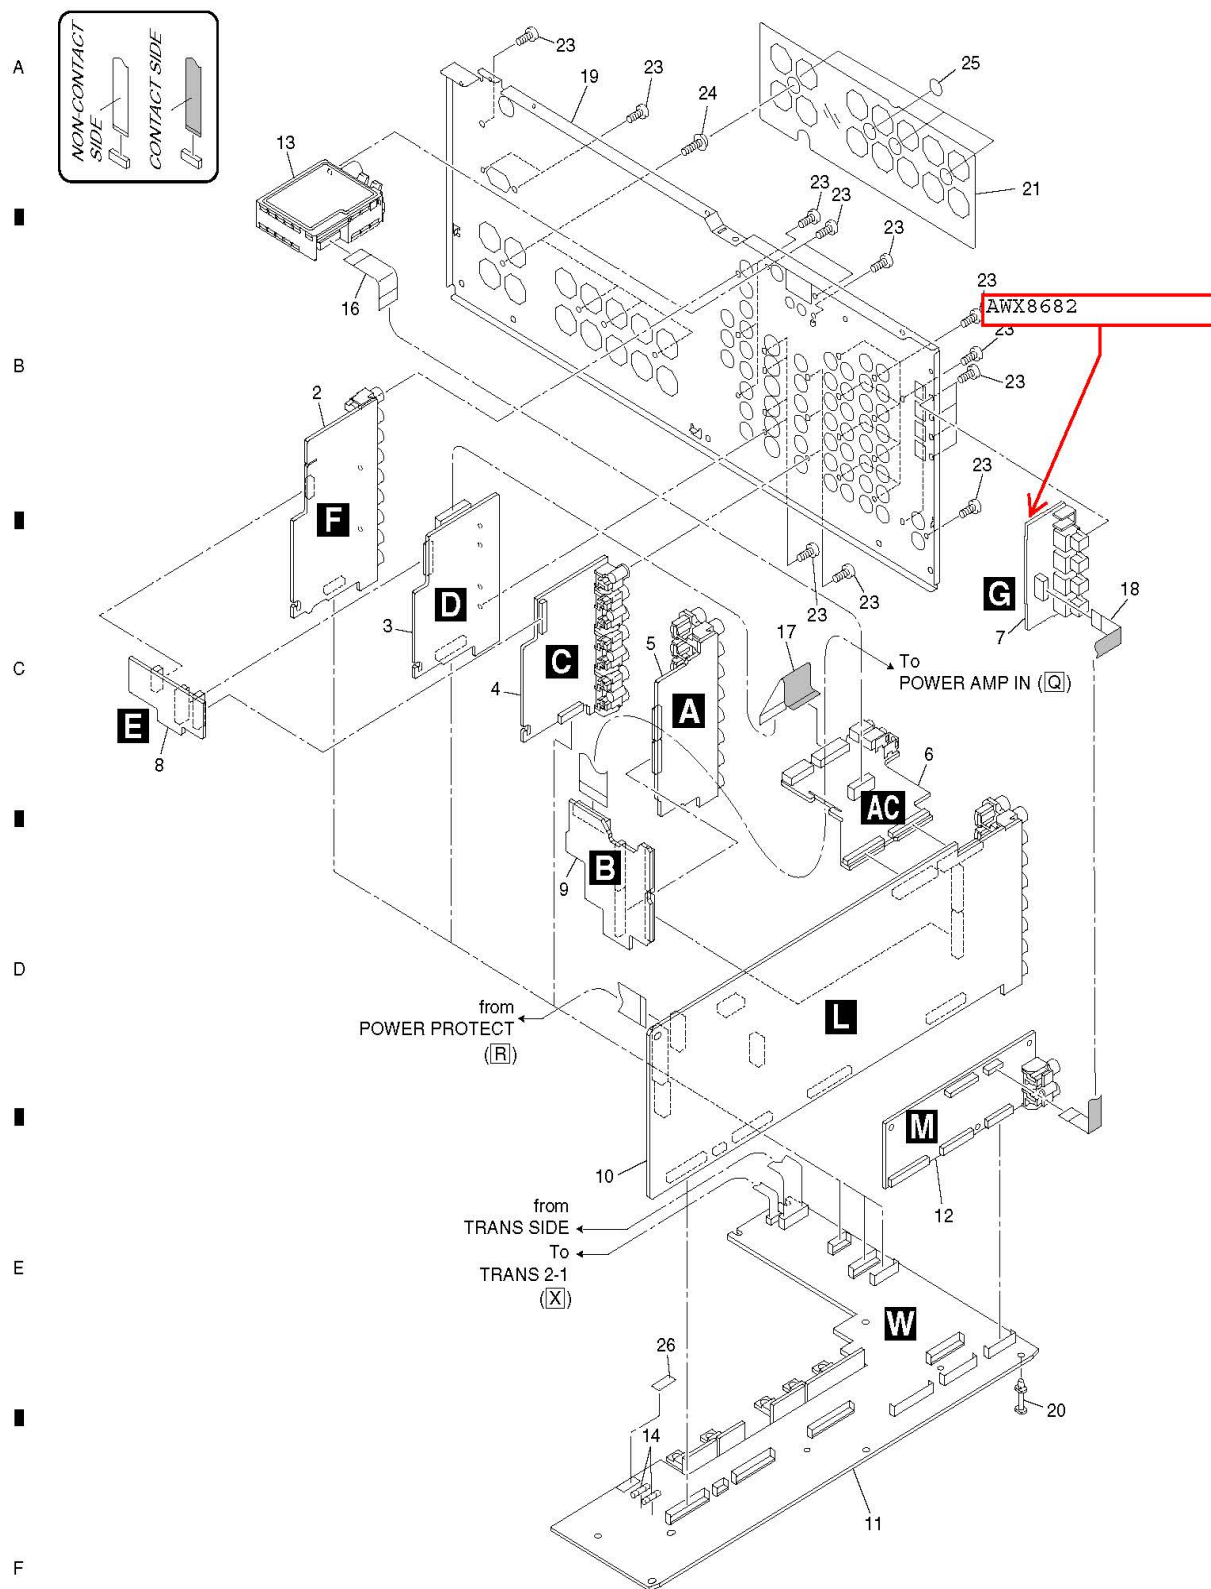

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	*****		16	Flexible Cable (11P)	ADD7476	
2	COMPONENT Assy	AWX8614	17	Flexible Cable (17P)	ADD7478	A
3	S VIDEO Assy	AWX8613	18	Flexible Cable (10P)	ADD7501	
4	COMPOSITE V Assy	AWX8612	19	Rear Panel	See Contrast table (2)	
5	MULTI CH I/O Assy	AWX8681	20	Card Spacer	AEC7502	
6	REAR TOP Assy	AWX8399	21	Speaker Sheet V1	AAK8176	
7	OPTICAL-IN Assy	AWX8682	22	*****		
NSP 8	VIDEO SIDE Assy	AWX8609	23	Screw	BBZ30P080FCC	
NSP 9	AUDIO CONNECT Assy	AWX8382	24	Screw	BBT30P100FCC	
10	MAIN CONTROL Assy	AWX8611	25	Cushion Circle 14B	AED7081	
11	REGULATOR Assy	AWX8679	NSP 26	Fuse Card	AAX2348	B
12	DSP Assy	AWX8572				
13	FM/AM TUNER Unit	AXX7170				
⚠ 14	Fuse (FU2501, 2502 : T1.25A)	REK1023				
15	*****					

(2) CONTRAST TABLE

VSX-1015-K/HYXJ and VSX-1015-S/HYXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	VSX-1015-K /HYXJ	VSX-1015-S /HYXJ
	19	Rear Panel 1015BY	ANC8318	Not used
	19	Rear Panel 1015SY	Not used	ANC8317