

Pioneer

Service Manual

ORDER NO.
RRV4530

AV Receiver

VSX-824-K

VSX-529-K

VSX-529-S

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Model	Type	Power Requirement	The voltage can be converted by the following method.
VSX-824-K	SYXEV8	AC 220 V to 230 V	-----
VSX-529-K	SYXEV8	AC 220 V to 230 V	-----
VSX-529-S	SYXEV8	AC 220 V to 230 V	-----
VSX-824-K	DLXEV	AC 110 V to 127 V/220 V to 240 V	With the voltage selector
VSX-824-K	FXEV	AC 110 V to 127 V/220 V to 240 V	With the voltage selector
VSX-824-K	AXEV5	AC 220 V	-----

This service manual should be used together with the following manual(s).


Model No.	Order No.	Remarks
VSX-824-K/CUXEVSM	RRV4520	
VSX-824-K, VSX-1024-K, VSX-1029-K, VSX-44, VSA-824	RRV4526	SCHEMATIC DIAGRAM, PCB CONNECTION DIAGRAM, PCB PARTS LIST

For SPECIFICATIONS and PANEL FACILITIES, refer to the operating instructions.

PIONEER CORPORATION 1-1, Shin-ogura, Saiwai-ku, Kawasaki-shi, Kanagawa 212-0031, Japan
PIONEER ELECTRONICS (USA) INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.
PIONEER EUROPE NV Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936
©PIONEER CORPORATION 2014

K-ZZZ JUNE 2014 Printed in Japan

A

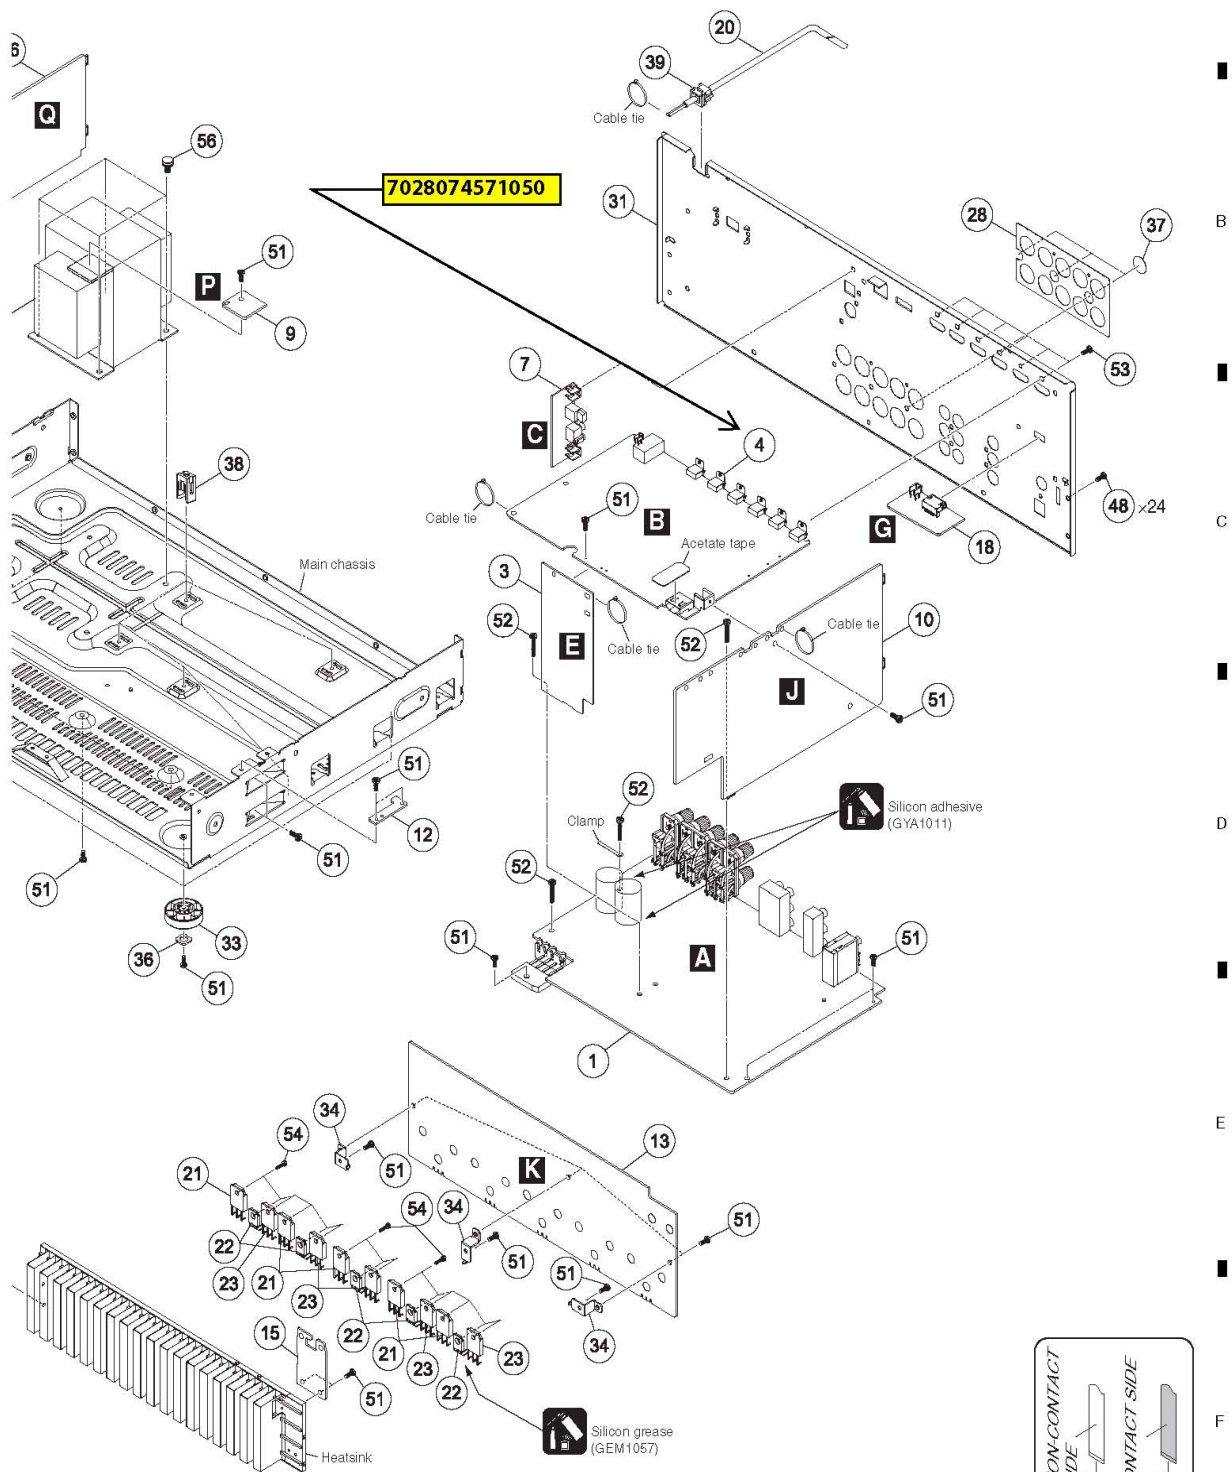

B

C

D


E

F

VSX-824-K

75

3.3 PCB LOCATIONS

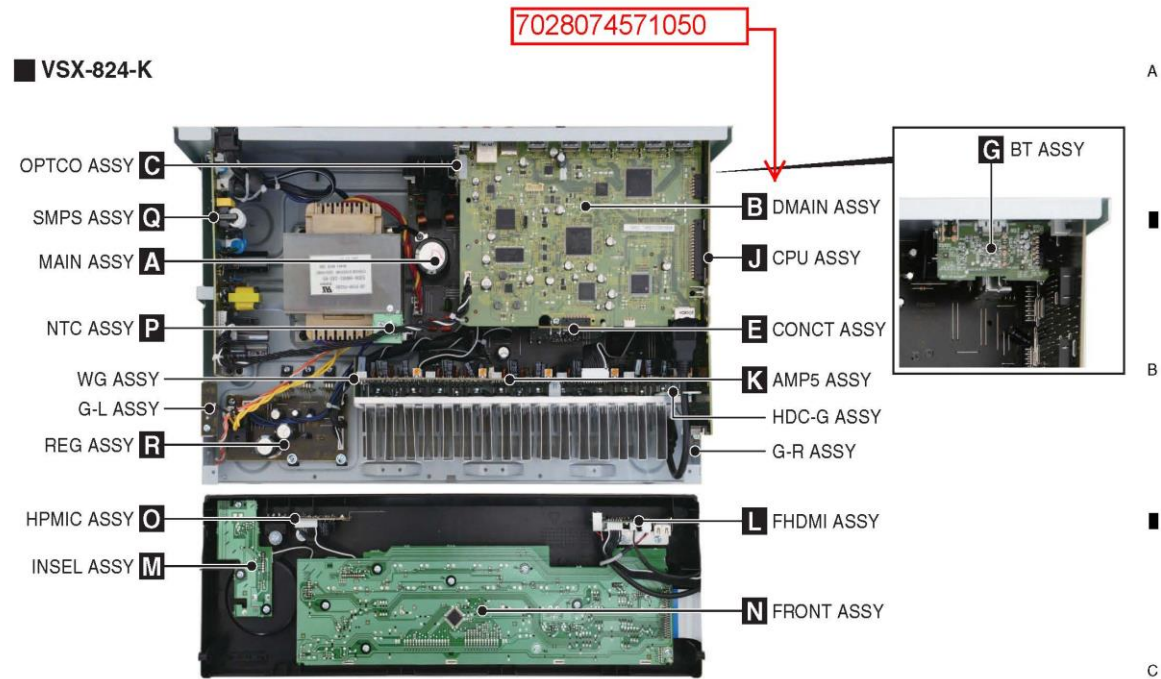

VSX-1024-K, VSX-1029-K, VSX-44

